

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(43) International Publication Date
19 February 2004 (19.02.2004)

PCT

(10) International Publication Number
WO 2004/014611 A1(51) International Patent Classification⁷: **B25B 1/10, 5/10, E04B 1/61, F16B 2/02, 5/00, 5/02, 12/18, 12/32**

(21) International Application Number:

PCT/AU2003/001007

(22) International Filing Date: 8 August 2003 (08.08.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

2002950670 9 August 2002 (09.08.2002) AU

(71) Applicant and

(72) Inventor: **DORNEY, Jarrod, Leigh** [—/AU]; 2 Ferrier Drive, Warnambool, Victoria 3280 (AU).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **VAN DE LOO, Paul** [—/AU]; Lot 26, Moores Road, Norton Summit, South Australia 5136 (AU). **ARNOLD, Aaron, Anthony** [AU/AU]; Unit 5, 2 Pickering Avenue, Fullerton, South Australia 5063 (AU).(74) Agent: **WATERMARK PATENT & TRADEMARK ATTORNEYS**; 290 Burwood Road, Hawthorn, Victoria 3122 (AU).(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CLAMPING ASSEMBLY

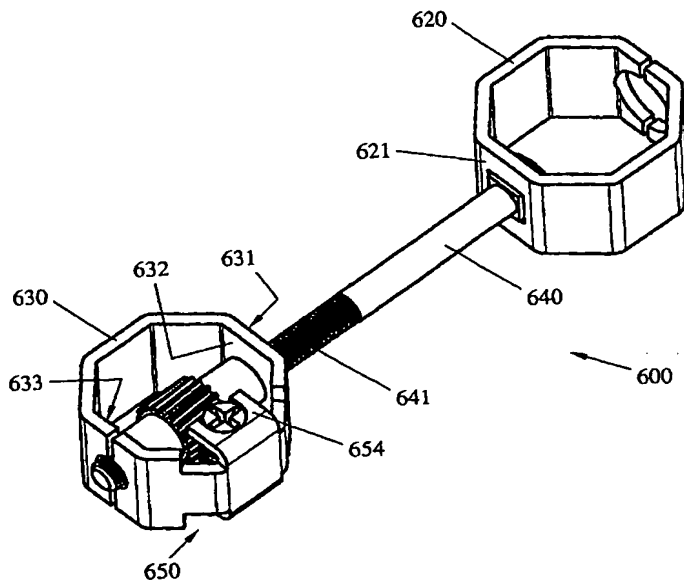

(57) **Abstract:** An adjustable clamp assembly (600) includes an elongated connection member (640) and a gear assembly (650). The gear assembly includes a rotatable first gear member having an axis of rotation substantially perpendicular to a longitudinal axis of the connection member (640). The gear assembly also includes a second gear member cooperatively engaged with the first gear member. The clamp assembly further includes a first clamp member (630). The elongated connection member (640), the gear assembly (650) and the first clamp member (630) are arranged such that rotation of the first gear member results in a linear motion of the first clamp member (630) parallel to the longitudinal axis of the connection member (640).